

TCL Solar Back Contact

HSM-BD54-WA460~475
G10LD-54P

475W

Maximum Power Output

23.8%

Maximum Efficiency



 Higher energy density;
lower operating temperature

 Lower hotspot temperature;
reduce risk of micro-cracks

 Refined design,
Busbar-free front side

 Comprehensive supply chain integration,
redefining BC standards


Linear Performance Warranty



25 Years
Product Warranty



30 Years Linear
Performance Warranty

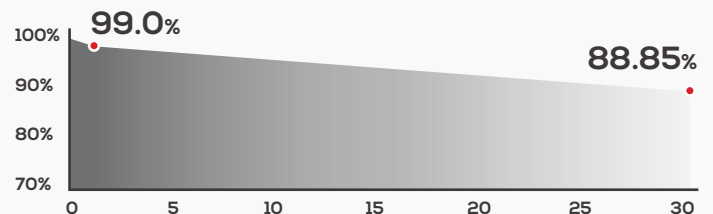

Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 ISO 9001:2015 ISO 45001:2018 ISO 14001:2015

HSM-BD54-WAxxx, where xxx = Pmax at STC
Measurement Tolerance: Pmax (W) $\pm 3\%$; Voc (V) $\pm 3\%$; Isc (A) $\pm 3\%$
* STC: Irradiance 1000W/m², Cell Temperature 25°C, AM1.5

Electrical Parameters (STC*)

Maximum Power	Pmax (W)	460	465	470	475
Open Circuit Voltage	Voc (V)	41.06	41.12	41.18	41.24
Short Circuit Current	Isc (A)	14.25	14.29	14.32	14.35
Maximum Power Voltage	Vmp (V)	34.62	34.68	34.74	34.80
Maximum Power Current	Imp (A)	13.29	13.41	13.54	13.66
Module Efficiency	(%)	23.1	23.3	23.6	23.8

Temperature Coefficient

Nominal Module Operating Temperature* $43 \pm 2^\circ\text{C}$

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Temperature Coefficient of Isc $+0.05\%/^\circ\text{C}$

Temperature Coefficient of Voc $-0.22\%/^\circ\text{C}$

Temperature Coefficient of Pmax $-0.26\%/^\circ\text{C}$

Operating Parameters

Operating Temperature $-40 \sim +70^\circ\text{C}$

Module [T98] max 70°C

Maximum System Voltage 1500V DC

Maximum Series Fuse Rating 25A

Mechanical Data


* Please refer to installation manual for details

No. of Cells	108pcs (6×18)
Dimension	1757×1134×30 mm
Weight	21.5kg $\pm 3\%$
Front Glass	3.2mm, Heat Strengthened, AR coating Glass
Back Sheet	White
Frame	Anodized Aluminium Alloy
J-Box	IP68, three diodes
Cables	4.0mm ² , +1200mm, -1200mm (can be customized)
Maximum Static Load	Front: +5400Pa/Back: -2400Pa*
Fire Rating	IEC Class C
Connectors:	Staubli Electrical Connectors AG, PV-KST4-EVO 2/xy_UR; PV-KBT4-EVO 2/xy_UR

Packaging Configuration

Modules per Pallet	37pcs
Modules per 40'HQ Container	962pcs
Pallets per 40'HQ Container	26pcs

Curve Graph

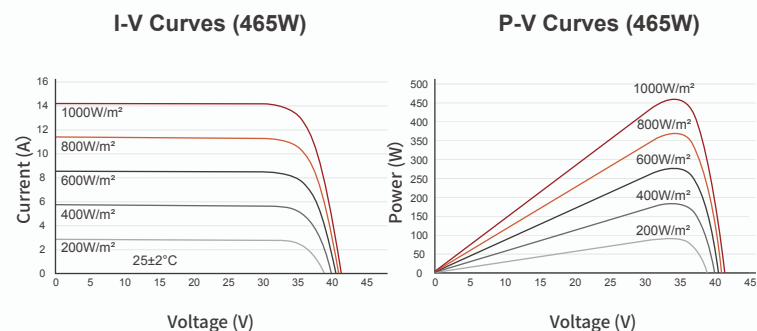

Engineering Drawing

[Unit: mm]

